
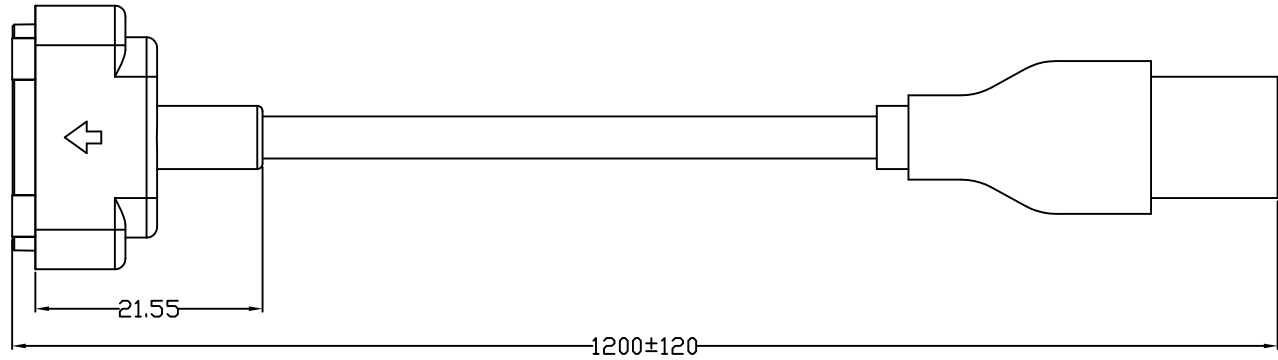


DWN No.: C-10510050008

**proposal**

Item	Part name	Q'ty/Ea'	Material	Finish
1	Plug connector	1	_____	_____
2	Wire	1	_____	_____
3	USB 2.0	1	_____	_____
4				
5				

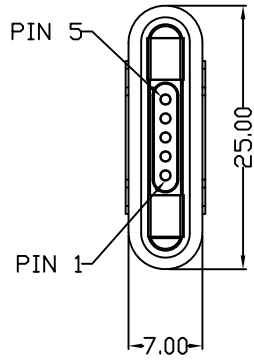

NOTES:  
 1. SPECIFICATION:  
 1.1 ELECTRICAL CHARACTERISTICS:  
 □ OPEN AND SHORT TEST  
 DIELECTRIC WITHSTANDING VOLTAGE:500V DC  
 INSULATION RESISTANCE:10M ΩHM  
 1.2 ENVIRONMENTAL CHARACTERISTICS:  
 □ OPERATING TEMPERATURE RANGE : -40°C TO +85°C.  
 2. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.  
 3. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

PIN ASSIGNMENTS		
Contact Number	Signal Name	Color
1	VCC	Red
2	D-	White
3	D+	Green
4	ID	
5	GND	Black

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DIST  
---  
DIST  
---

Rev.	Revision record.	Date.
2	UPDATE DRAWING	2015/09/07
1	NEW	2014/12/05

Top-Link Electronics Ltd.		Type Customer drawing	Unit mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED 0. = ± - 0.0 = ± 0.20 0.00 = ± 0.15 0.000 = ± - Angle: ±1° SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.		DWN: Minos	APVD:	
		CHK:	REL:	
Name POGO PIN CONNECTOR				
Scale 1:1	Size A4	DWG No. C-10510050008	Page 1/1	Rev. 2

10510050008  
PART NUMBER

4

3

2

1