




proposal

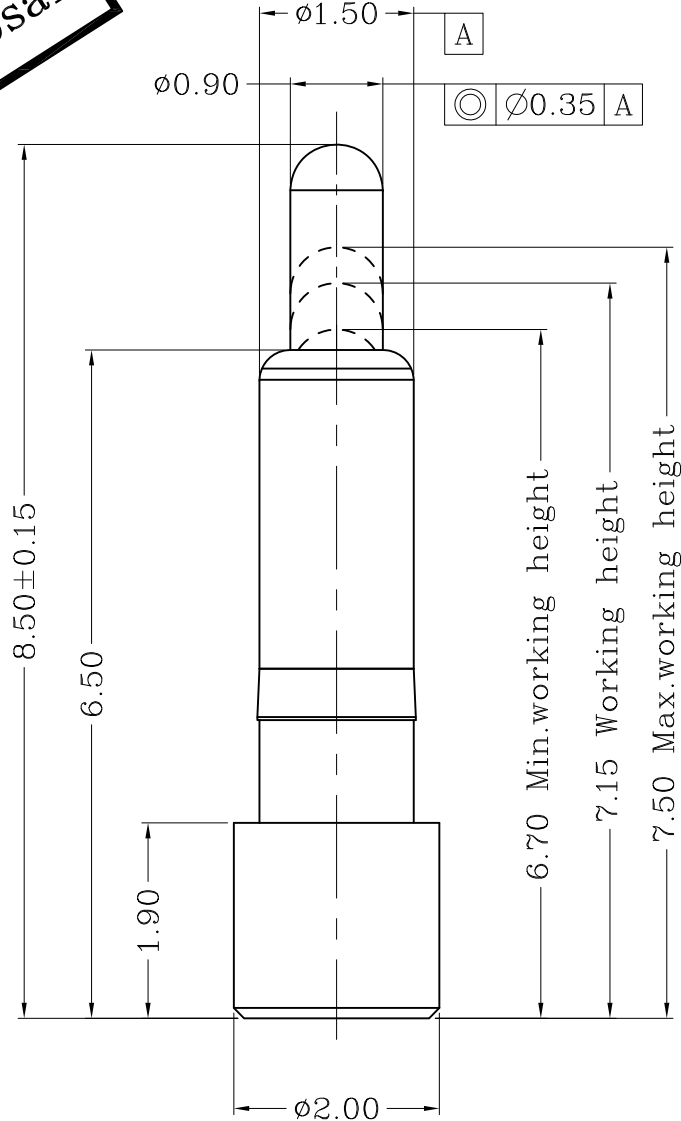

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	—————
4				
5				

Table 1 Mechanical performance		
Working height	7.15mm	168±25gf <2.1>
Durability	10000cycle	

Notes:

- Dimensions shall be interpreted per ASME Y14.5M.
- Mechanical performance(See the table 1)  
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.  
<2.2>Warning: Working height are not permitted to be less than Min working height.
- Electrical performance  
Resistance: 30mOhm Max.  
Current rating: 2.0A
- RoHS compliant.

DIST  
---

DIST  
---

B1	Update	2015/12/25
B	Update remark	2007/09/28
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Customer drawing		Unit	mm		Weight		
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Cai wanlu		APVD:			<div>top-Link</div> <div>Electronics</div> <div>Top-Link Electronics Ltd.</div>		
0. = ± -		CHK:			REL:					
0.0 = ± 0.15										
0.00 = ± 0.10										
0.000= ± -										
Angle: ±		Name								
SURF TEXTURE: REMOVE BURRS.		POGO PIN								
BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.		Scale	1:1	Size	A4	DWG No.	C-101020		Page	1/1
								Rev.	B1	

101020-1

PART NUMBER