


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWN No.: C-101036

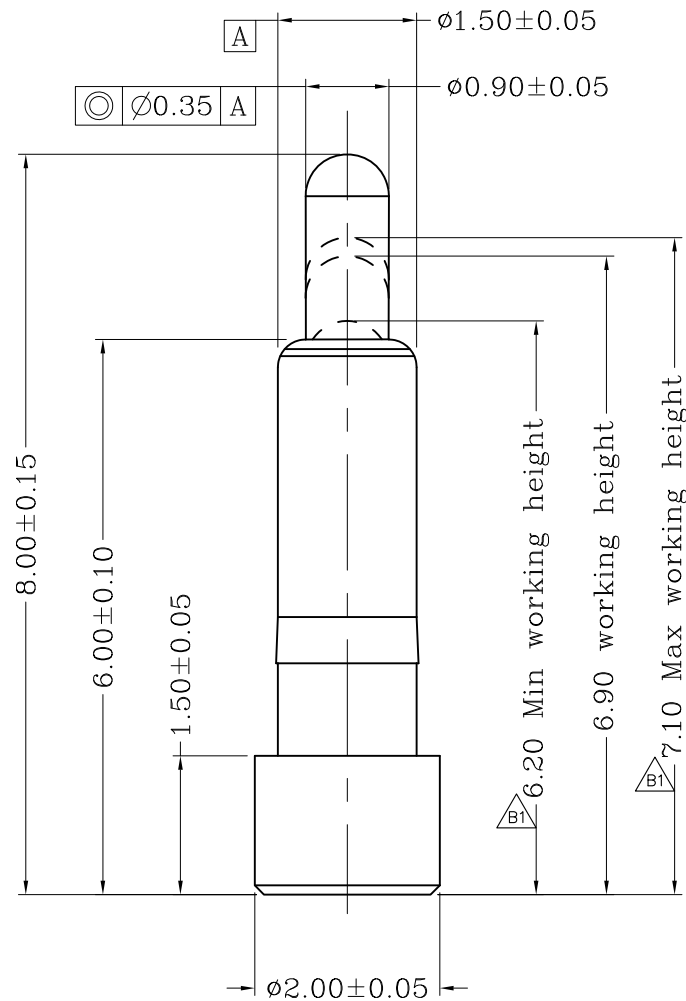

DIST

DIST

4

3

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Min 0.1um Gold over 1.4~3.4um Nickel
2	Plunger	1	Leaded Brass	Min 0.4um Gold over 1.4~3.4um Nicke
3	Spring	1	Stainless steel wire	—————
4				
5				

D

Table 1 Mechanical performance		
working height	6.90mm	110±30gf <2.1>
Durability	10000cycle	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
 - 4 RoHS compliant.

C

B

B1	Renewal	2015/08/13
B	Renewal	2011/05/27
A	NEW	2007/04/03
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Customer drawing		Unit	mm	Weight		
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Caiwanlu	APVD:			<i>top-Link</i> Electronics	Top-Link Electronics Ltd.	
0. = ± -		CHK:		REL:					
0.0 = ± 0.15									
0.00 = ± 0.10									
0.000 = ± -									
Angle: ± 1°									
SURF TEXTURE: REMOVE BURRS.									
BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.									

A

101036-1

PART NUMBER