


C-101076

proposal

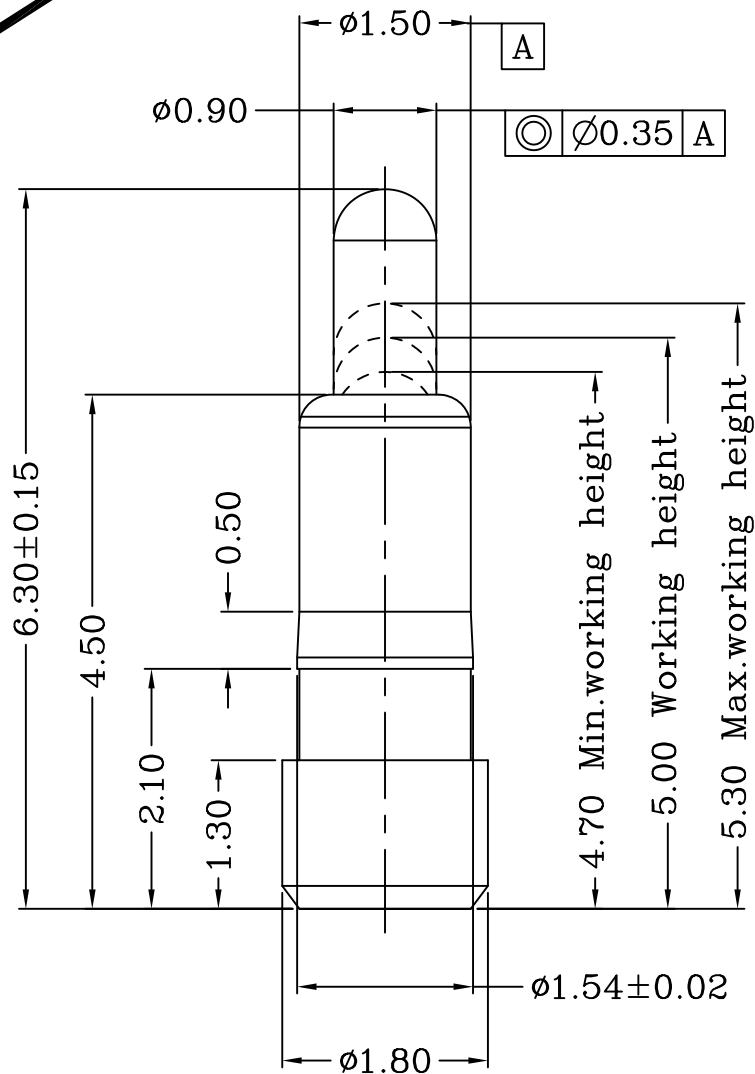

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
Working height	5.00mm	125±35gf<2.1>
Durability	10000cycle	

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.

<2.2>Warning:Working height are not permitted to be less than Min working height.

3 Electrical performance

Resistance: 30mOhm Max.

Current rating: 2.0A

4 RoHS compliant.

C2	Update	2016/07/07
C1	Update	2015/12/26
C	update remark	2007/12/19
Rev.	Revision record.	Date.

<b>Top-Link Electronics Ltd.</b>  TOLERANCES UNLESS OTHER SPECIFIED 0. = ± - 0.0 = ± 0.15 0.00 = ± 0.10 0.000 = ± - Angle: ± ° SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.D0 NOT SCALE PRINT.	Type	Customer drawing	Unit	mm	Weight	
	DWN:	Cai wanlu	APVD:		<i><b>top-Link</b></i> <b>Electronics</b>	Top-Link Electronics Ltd.
	CHK:		REL:			
	Name	POGO PIN				
	Scale	Size	DWG No.		Page	Rev.
	1:1	A4	C-101076		1/1	C2

101076-1

PART NUMBER

***top-Link***  
***Electronics***

Top-Link  
Electronics Ltd.

DIST

DIST