




DWN No.: C-101080

DIST

DIST

2.80 Working height

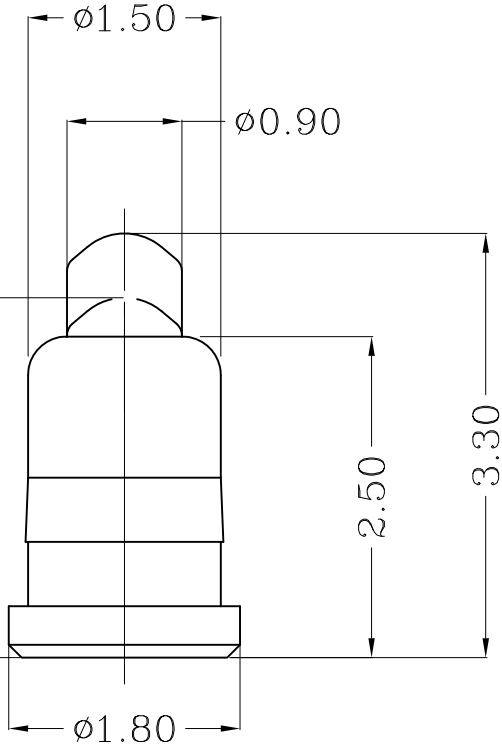

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	—————
4				
5				

Table 1 Mechanical performance		
working height	2.80mm	70gf Min
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
Resistance:30mOhm Max.
Current rating: 2.0A
- 4 RoHS compliant.

	Update	2015/08/05
	update remark	2012/10/10
Rev.	Revision record.	Date.

Top-Link Electronics Ltd. TOLERANCES UNLESS OTHER SPECIFIED 0. = ± 0.0 = ± 0.15 0.00 = ± 0.10 0.000= ± Angle: ±1° SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.	Type	Customer drawing		Unit	mm	Weight		
	DWN:	Cai wanlu	APVD:		<div>top-Link</div> <div>Electronics</div> <div>Top-Link Electronics Ltd.</div>			
	CHK:		REL:					
	Name						POGO PIN	
	Scale	1:1	Size	A4	DWG No.	C-101080	Page	1/1
					Rev.	D1		

101080-1

PART NUMBER

top-Link
Electronics

Top-Link
Electronics Ltd.