




proposal

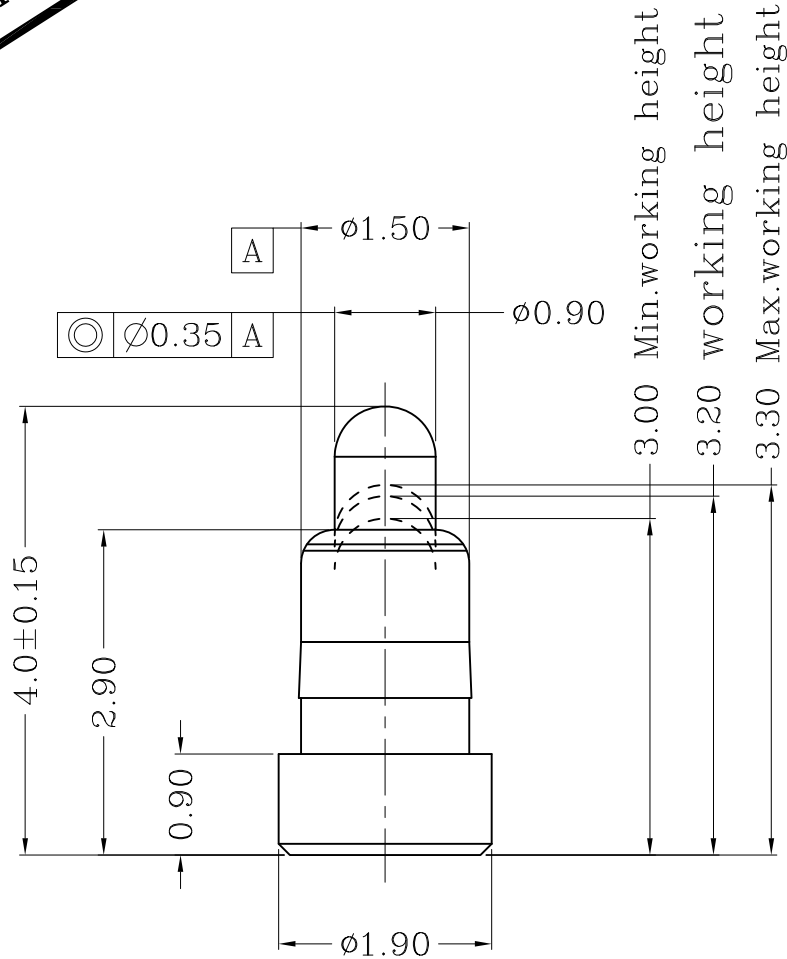

DIST

DIST

4

A1	Update	2015/07/08
A	NEW	2007/10/07
Rev.	Revision record.	Date.

3

Top-Link Electronics Ltd.		Type Customer drawing	Unit mm		Weight _____	
TOLERANCES UNLESS OTHER SPECIFIED		DWN: Cai wanlu	APVD:		<div><i>top-Link</i></div> <div><i>Electronics</i></div> <div>Top-Link Electronics Ltd.</div>	
0. = ±		CHK:	REL:			
0.0 = ± 0.15						
0.00 = ± 0.10						
0.000 = ±		Name POGO PIN				
Angle: ±1°		Scale 1: 1	Size A4	DWG No. C-101112		Page 1/1
SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.						Rev. A1

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	
4				
5				

Table 1 Mechanical performance		
working height	3.20mm	120±35gf <2.1>
Durability	10000cycle	

Notes:

- Dimensions shall be interpreted per ASME Y14.5M.
- Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working height are not permitted to be less than Min working height.
- Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- RoHS compliant.

101112-1

PART NUMBER

A