


| | |
|------|-----|
| DIST | --- |
| DIST | --- |

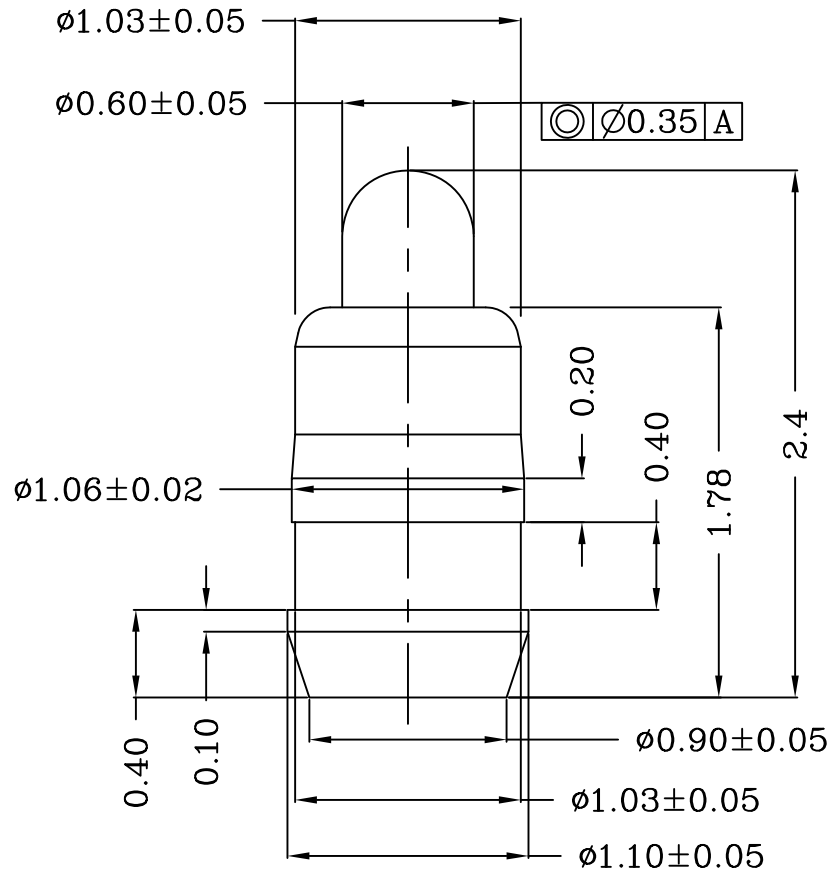


| Item | Part name | Q'ty/Ea' | Material | Finish |
|------|-----------|----------|----------------------|--------------------|
| 1 | Body | 1 | Leaded Brass | Au plating over Ni |
| 2 | Plunger | 1 | Leaded Brass | Au plating over Ni |
| 3 | Spring | 1 | Stainless steel wire | ————— |
| 4 | | | | |
| 5 | | | | |

| | | |
|--------------------------------|------------|---------------|
| Table 1 Mechanical performance | | |
| working height | 1.90mm | 70±20gf <3.1> |
| Durability | 10000cycle | |

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <3.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
Resistance: 50mOhm Max.Current rating: 1.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS complaint.

| | | |
|------|------------------|------------|
| | | |
| | NEW | 2011/05/23 |
| Rev. | Revision record. | Date. |

| | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|------------|--------------------------------------------------------------------------------------------------------------------|
| Top-Link Electronics Ltd. | Type Customer drawing | Unit mm | Weight |
| TOLERANCES UNLESS OTHER SPECIFIED 0. = \pm - 0.0 = \pm 0.15 0.00 = \pm 0.10 0.000= \pm - Angle: \pm SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT. | DWN: Qin | APVD: |  Top-Link Electronics Ltd. |
| | CHK: | REL: | |
| | Name POGO PIN PG-1.1-0.4-1.03-1.78-2.40 | | |
| | Scale 1:1 | Size A4 | DWG No. C-101118 |
| | | | Page 1/1 |
| | | | Rev. A |

| |
|-------------|
| 101118-1 |
| PART NUMBER |