




DWN No.: C-101175

DIST

DIST

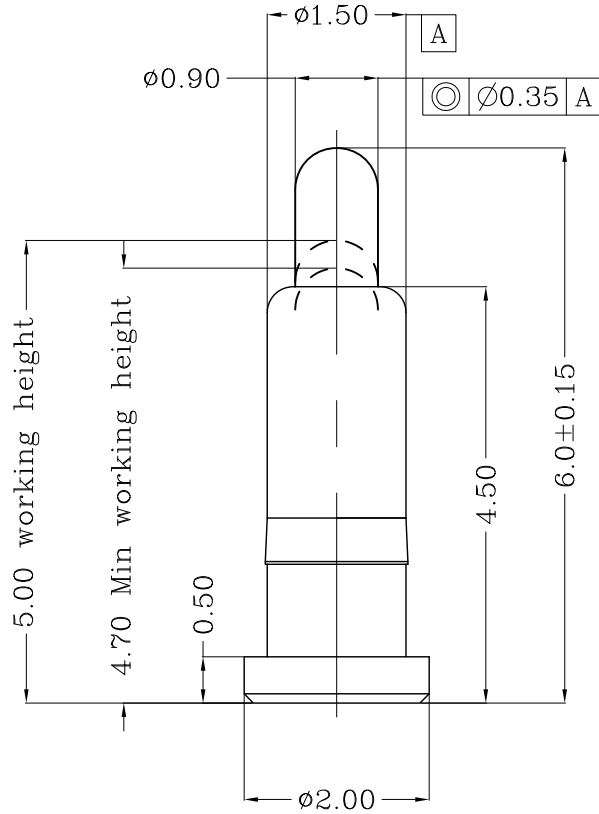

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni plating
2	Plunger	1	Leaded Brass	Au plating over Ni plating
3	Spring	1	Stainless steel wire	—————
4				
5				

Table 1 Mechanical performance		
working height	5.00mm	90gf min<2.1>
Durability	10000cycle	

Notes:

- Dimensions shall be interpreted per ASME Y14.5M.
- Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning:Working height are not permitted to be less than Min working height.
- Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- RoHS compliant.

	NEW	2009/04/20
Rev.	Revision record.	Date.

Top-Link Electronics Ltd. TOLERANCES UNLESS OTHER SPECIFIED 0. = ± - 0.0 = ± 0.15 0.00 = ± 0.10 0.000= ± - Angle: ±1° SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.	Type	Customer drawing		Unit	mm	Weight	
	DWN:	Qin		APVD:		<div>top-Link Electronics</div> <div>Top-Link Electronics Ltd.</div>	
	CHK:			REL:			
	Name						
	POGO PIN						
	Scale	Size	DWG No.			Page	Rev.
	1:1	A4	C-101175			1/1	1

101175-1

PART NUMBER

top-Link
Electronics

Top-Link Electronics Ltd.