




proposal

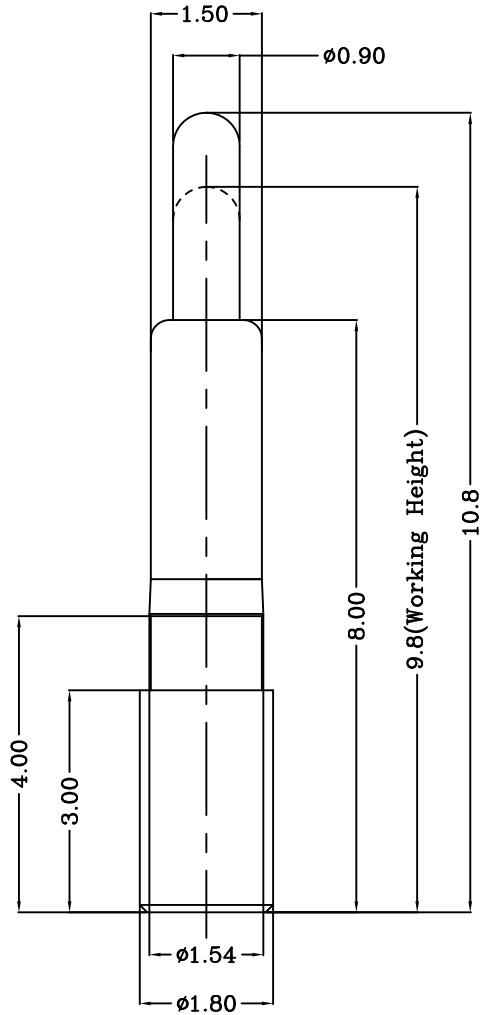

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 2.5um
3	Spring	1	Stainless steel wire	—————
4				
5				

Table 1 Mechanical performance

working height	9.8mm	120gf Min
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
Resistance: 30mOhm Max.Current rating: 2.0A
- 4 RoHS compliant.

DIST

DIST

	Update	2012/09/17
	NEW	2008/04/07
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type Customer drawing	Unit mm	Weight	
TOLERANCES UNLESS OTHER SPECIFIED		DWN: Cai wanlu	APVD:	<div>top-Link Electronics</div> <div>Top-Link Electronics Ltd.</div>	
0. = ± -		CHK:	REL:		
0.0 = ± 0.15					
0.00 = ± 0.10					
0.000= ± -					
Angle: ±'					
SURF TEXTURE: REMOVE BURRS.		Name POGO PIN			
BREAK SHARP EDGES		Scale 1:1	Size A4	DWG No. C-101184	Page 1/1
R0.05 MAX.DO NOT SCALE PRINT.					Rev. B

101184-1

PART NUMBER