




DWN No.:

C-101211

DIST

DIST

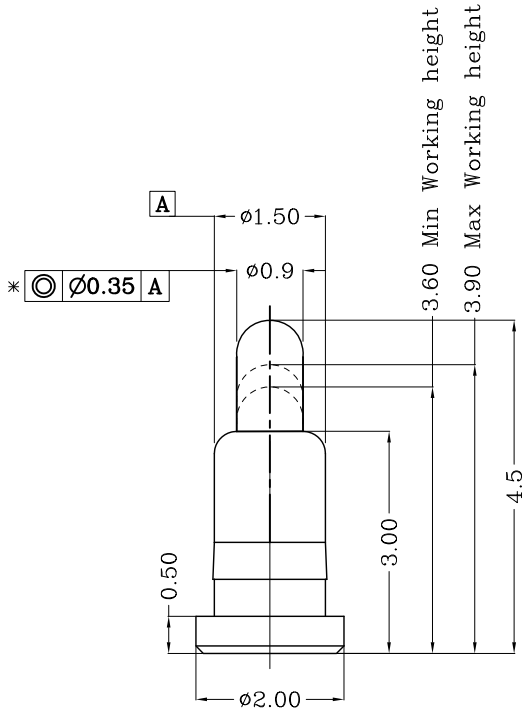

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	—————
4				
5				

Table 1 Mechanical performance

Max working height	3.90mm	80gf min <2.1>
Min working height	3.60mm	180gf Max
Durability	10000cycle	

Notes:

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.

<2.2>Warning: Working height are not permitted to be less than Min working height.

3 Electrical performance

Resistance: 30mOhm Max.Current rating: 2.0A

4 RoHS compliant.

	Renewal	2011/08/13
	NEW	2008/05/28
Rev.	Revision record.	Date.

Top-Link Electronics Ltd. TOLERANCES UNLESS OTHER SPECIFIED 0. = ± - 0.0 = ± 0.15 0.00 = ± 0.10 0.000= ± - Angle: ±1° SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.	Type	Customer drawing	Unit	mm	Weight					
	DWN:	Qin zuozhong	APVD:	<div>top-Link</div> <div>Electronics</div> <div>Top-Link Electronics Ltd.</div>						
	CHK:		REL:							
	Name									
	POGO PIN									
	Scale	1: 1	Size	A4	DWG No.	C-101211	Page	1/1	Rev.	C