




proposal

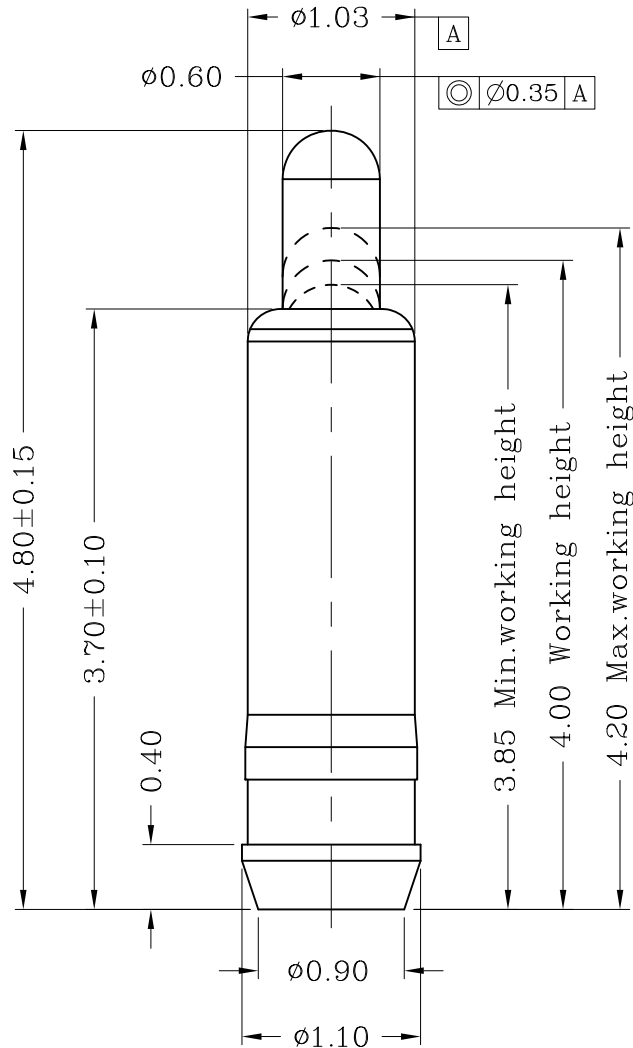

DIST  
---

DIST  
---

4

3

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	—————
4				
5				

D

Table 1 Mechanical performance		
Working height	4.00mm	100±30gf <2.1>
Durability	10000cycle	

C

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)  
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.  
<2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance  
Resistance: 30mOhm Max.  
Current rating: 2.0A
- 4 RoHS compliant.

B

B1	Update	2015/12/30
B	Update	2010/08/02
A	NEW	2009/01/09
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Customer drawing		Unit	mm		Weight									
TOLERANCES UNLESS OTHER SPECIFIED 0. = ± - 0.0 = ± 0.15 0.00 = ± 0.10 0.000= ± - Angle: ±1° SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.		DWN:		Cai wanlu		APVD:		<div><i>top-Link</i></div> <div><i>Electronics</i></div> <div>Top-Link Electronics Ltd.</div>									
		CHK:				REL:											
		Name															
		POGO PIN															
Scale		1: 1		Size		A4		DWG No.		C-101317		Page	1/1		Rev.	B1	

A

101317-1

PART NUMBER