


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWG No.: C-101375



proposal

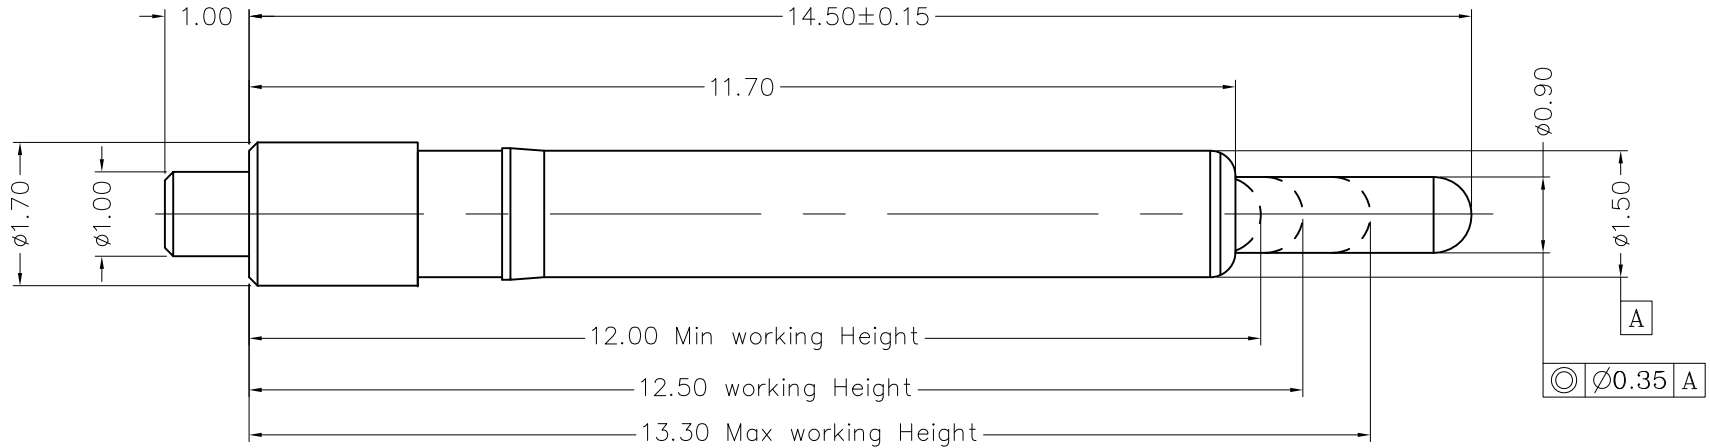

Notes:

- Dimensions shall be interpreted per ASME Y14.5M.
- Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning:Working height are not permitted to be less than Min working height.
- Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- RoHS compliant.

Table 1 Mechanical performance		
Working height	12.50mm	180±35gf <2.1>
Durability	10000cycle	

Top-Link Electronics Ltd.		Type	Customer drawing		Unit	mm		Weight		
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Cai wanlu			APVD:	<div><i>top-Link</i></div> <div><i>Electronics</i></div> <div>Top-Link Electronics Ltd.</div>			
0. = ± -		CHK:				REL:				
0.0 = ± 0.15										
0.00 = ± 0.10										
0.000= ± -										
Angle: ±1°										
SURF TEXTURE: REMOVE BURRS.										
BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.										

A	Update	2015/12/26
1.1	NEW	2009/07/07
Rev.	Revision record.	Date.

DIST

DIST

4

3

2

1

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	
4				
5				