




DWG No.: C-101501

DIST

DIST

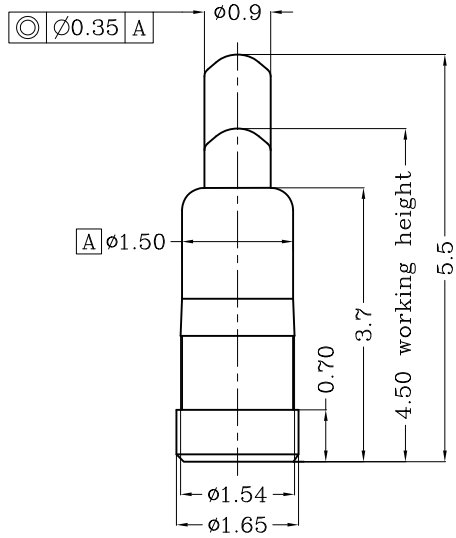

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	—————
4				
5				

Table 1 Mechanical performance

Working height	4.50mm	50±10 gf <2.1>
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
Resistance: 50mOhm Max.Current rating: 2.0A
- 4 RoHS compliant.

	NEW	2011/07/01
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin zuozhong	APVD:		<div><i>top-Link</i></div> <div>Electronics</div> <div>Top-Link Electronics Ltd.</div>	
0. = ± -		CHK:		REL:			
0.0 = ± 0.15		Name POGO PIN					Top-Link Electronics Ltd.
0.00 = ± 0.10							
0.000= ± -							
Angle: ±1°							
SURF TEXTURE:							
REMOVE BURRS.							
BREAK SHARP EDGES							
R0.05 MAX.DO NOT							
SCALE PRINT.		Scale	Size	DWG No.		Page	Rev.
		1:1	A4	C-101501		1/1	A

101501-1

PART NUMBER