



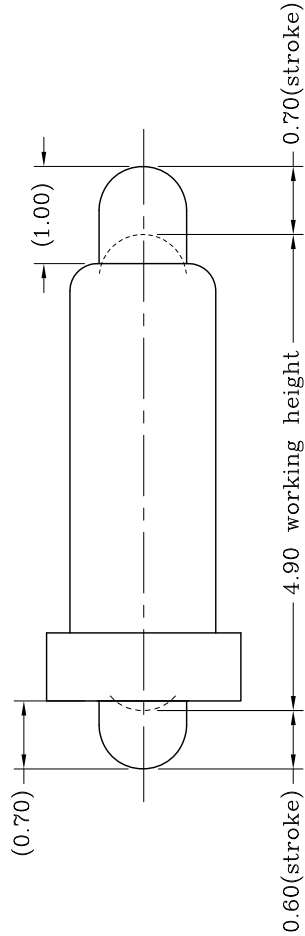

DWN No.:

C-101524

proposal

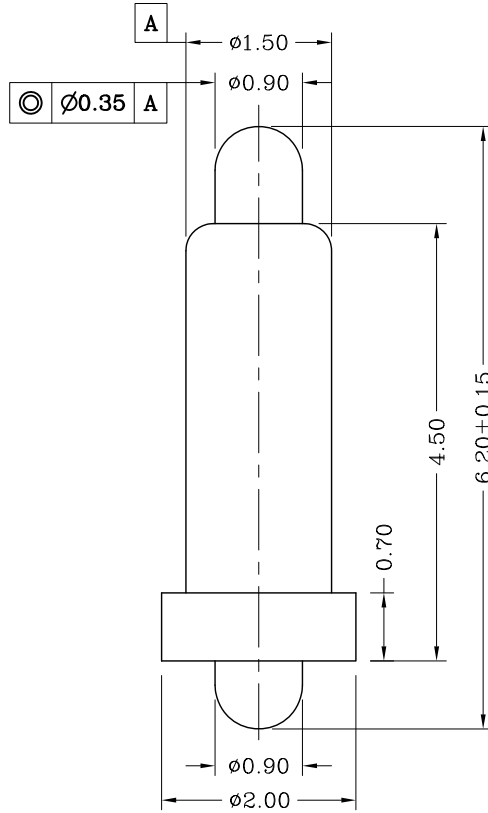

DIST

DIST

4

3

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	2	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	—————
4				
5				

Table 1 Mechanical performance

working height	4.90mm	80gf min<2.1>
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
Resistance: 30mOhm max Current rating: 2.0A
- 4 RoHS compliant.
- 5 Customer P/N: C102

101524-1

PART NUMBER

	BODY加高0.5mm	2011/08/23
	总高加高0.5mm	2011/08/23
	NEW	2011/08/22
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type Customer drawing	Unit mm	Weight	
TOLERANCES UNLESS OTHER SPECIFIED 0. = ± 0.0 = ±0.15 0.00 = ±0.10 0.000= ± Angle: ±1° SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.		DWN: Qin	APVD:	<div><div><i>top-Link</i></div><div><i>Electronics</i></div></div> <div>Top-Link Electronics Ltd.</div>	
		CHK:	REL:		
Name POGO PIN					
Scale 1:1	Size A4	DWG No. C-101524		Page 1/1	Rev. A

2

1