




proposal

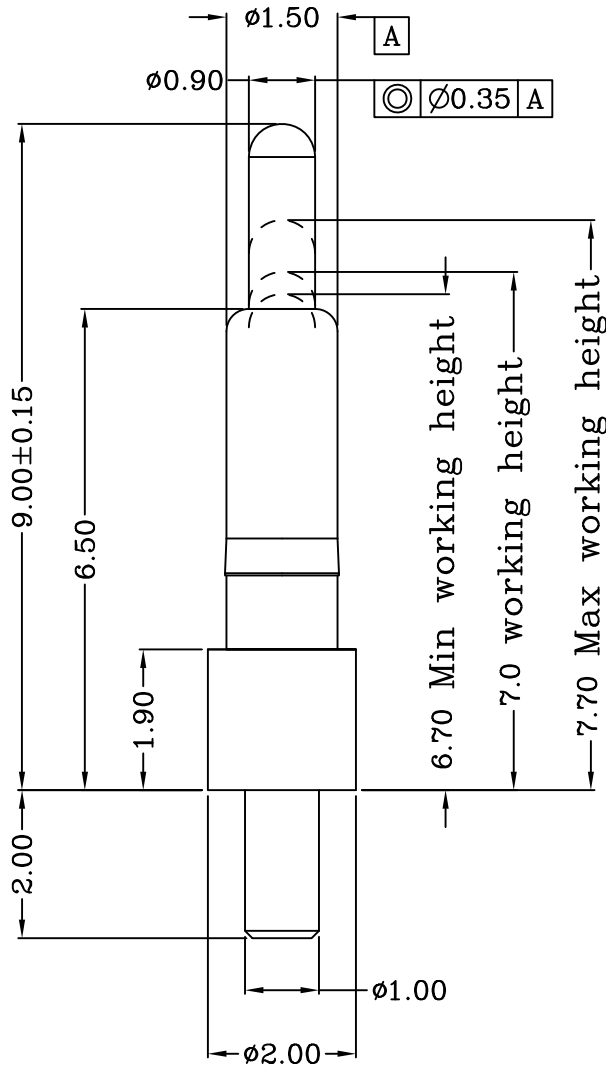

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	—————
4				
5				

Table 1 Mechanical performance

working height	7.00mm	85gf min
Durability	10000cycle	

Notes:

- Dimensions shall be interpreted per ASME Y14.5M.
- Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working height are not permitted to be less than Min working height.
- Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- RoHS compliant.

DIST

Rev.	NEW	2013/04/11
Revision record.		Date.

Top-Link Electronics Ltd.		Type Customer drawing	Unit mm	Weight	
TOLERANCES UNLESS OTHER SPECIFIED		DWN: Cai wanlu	APVD:	<div><div>top-Link</div><div>Electronics</div></div> <div>Top-Link Electronics Ltd.</div>	
0. = ± -		CHK:	REL:		
0.0 = ± 0.15					
0.00 = ± 0.10					
0.000= ± -					
Angle: ± 1°		Name POGO PIN			
SURF TEXTURE: REMOVE BURRS.					
BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.		Scale 1:1	Size A4	DWG No. C-101718	Page 1/1
					Rev. 1

101718-1
PART NUMBER