




proposal

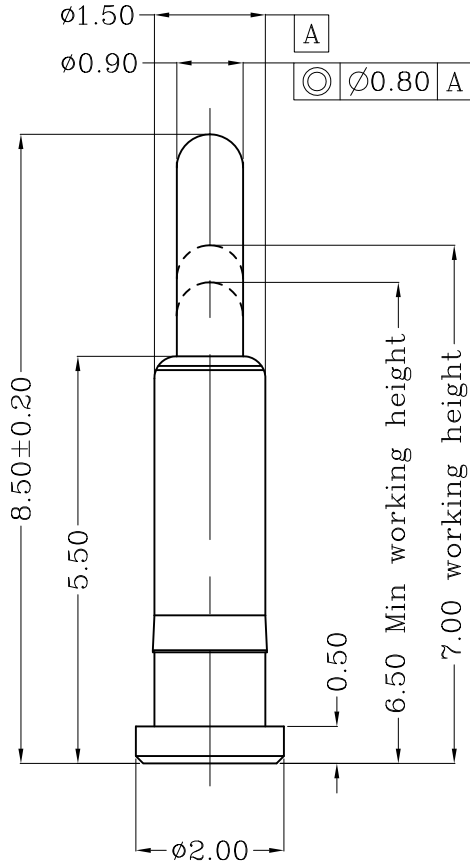

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	—————
4				
5				

Table 1 Mechanical performance

working height	7.00mm	80gf min
Durability	10000cycle	


Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 RoHS compliant.

DIST

DIST

	Update	2013/05/06
	NEW	2013/04/29
Rev.	Revision record.	Date.

Top-Link Electronics Ltd. TOLERANCES UNLESS OTHER SPECIFIED 0. = ± - 0.0 = ± 0.15 0.00 = ± 0.10 0.000= ± - Angle: ±1° SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.	Type	Customer drawing		Unit	mm	Weight				
	DWN:	Cai wanlu	APVD:		<div>Top-Link Electronics Ltd.</div>					
	CHK:		REL:							
	Name									
	POGO PIN									
	Scale	1:1	Size	A4	DWG No.	C-101740	Page	1/1	Rev.	2

101740-1

PART NUMBER