
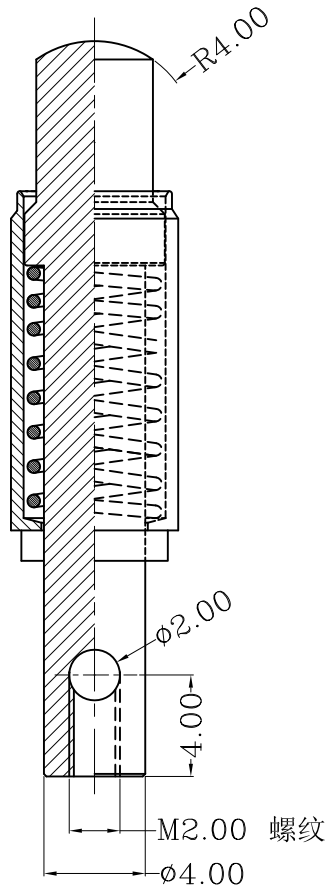


C-101752

proposal

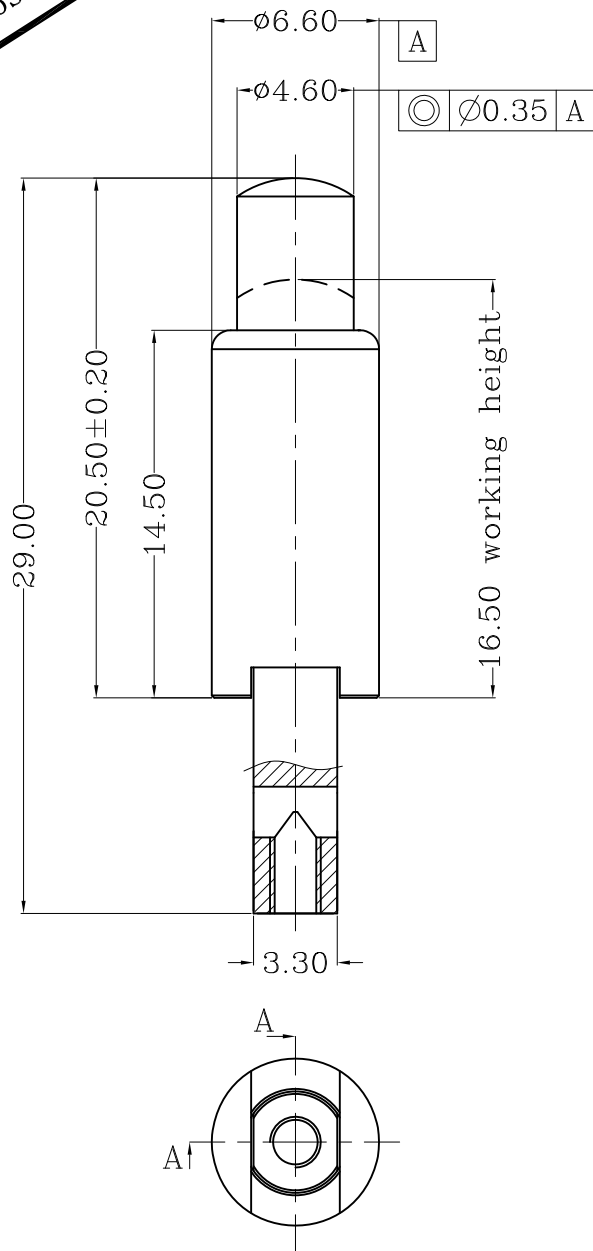

A—A

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Nickel plating
2	Plunger	1	Leaded Brass	Gold plating over Nickel plating
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance

Table 1 Mechanical performance		
Working height	16.5mm	300gf Max<2.1>
Durability	500,000cycle	

Notes:

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.

Electrical performance

Current rating:10.0A

4 RoHS compliant.

2	Update	2016/02/20
1	NEW	2013/06/05
Rev.	Revision record.	Date.

Top-Link
Electronics Ltd.
TOLERANCES UNLESS
OTHER SPECIFIED
0. = \pm —
0.0 = \pm 0.15
0.00 = \pm 0.10
0.000 = \pm —
Angle: \pm °
SURF TEXTURE:
REMOVE BURRS.
BREAK SHARP EDGES
R0.05 MAX.DO NOT
SCALE PRINT.

Type	Customer drawing	Unit	mm	Weight	_____
DWN:	Cai wanlu	APVD:		<i>top-Link</i> <i>Electronics</i> Top-Link Electronics Ltd.	
CHK:		REL:			
Name	Customer drawing				
Scale	1:1	Size	A4	DWG No.	C-101752
				Page	1/1
				Rev.	2

101752-1

PART NUMBER

top-Link
Electronics

Top-Link
Electronics Ltd.